CONTACT SETTINGS. Must use a Y-Adapter. For best results use stainless steel cylinders.

Amplitude = 10 to 13 V. Offset = 0% (zero). Carrier frequency = 2977792. Double square waves.

Use spooky2 software version 20190903. Wobble disabled.

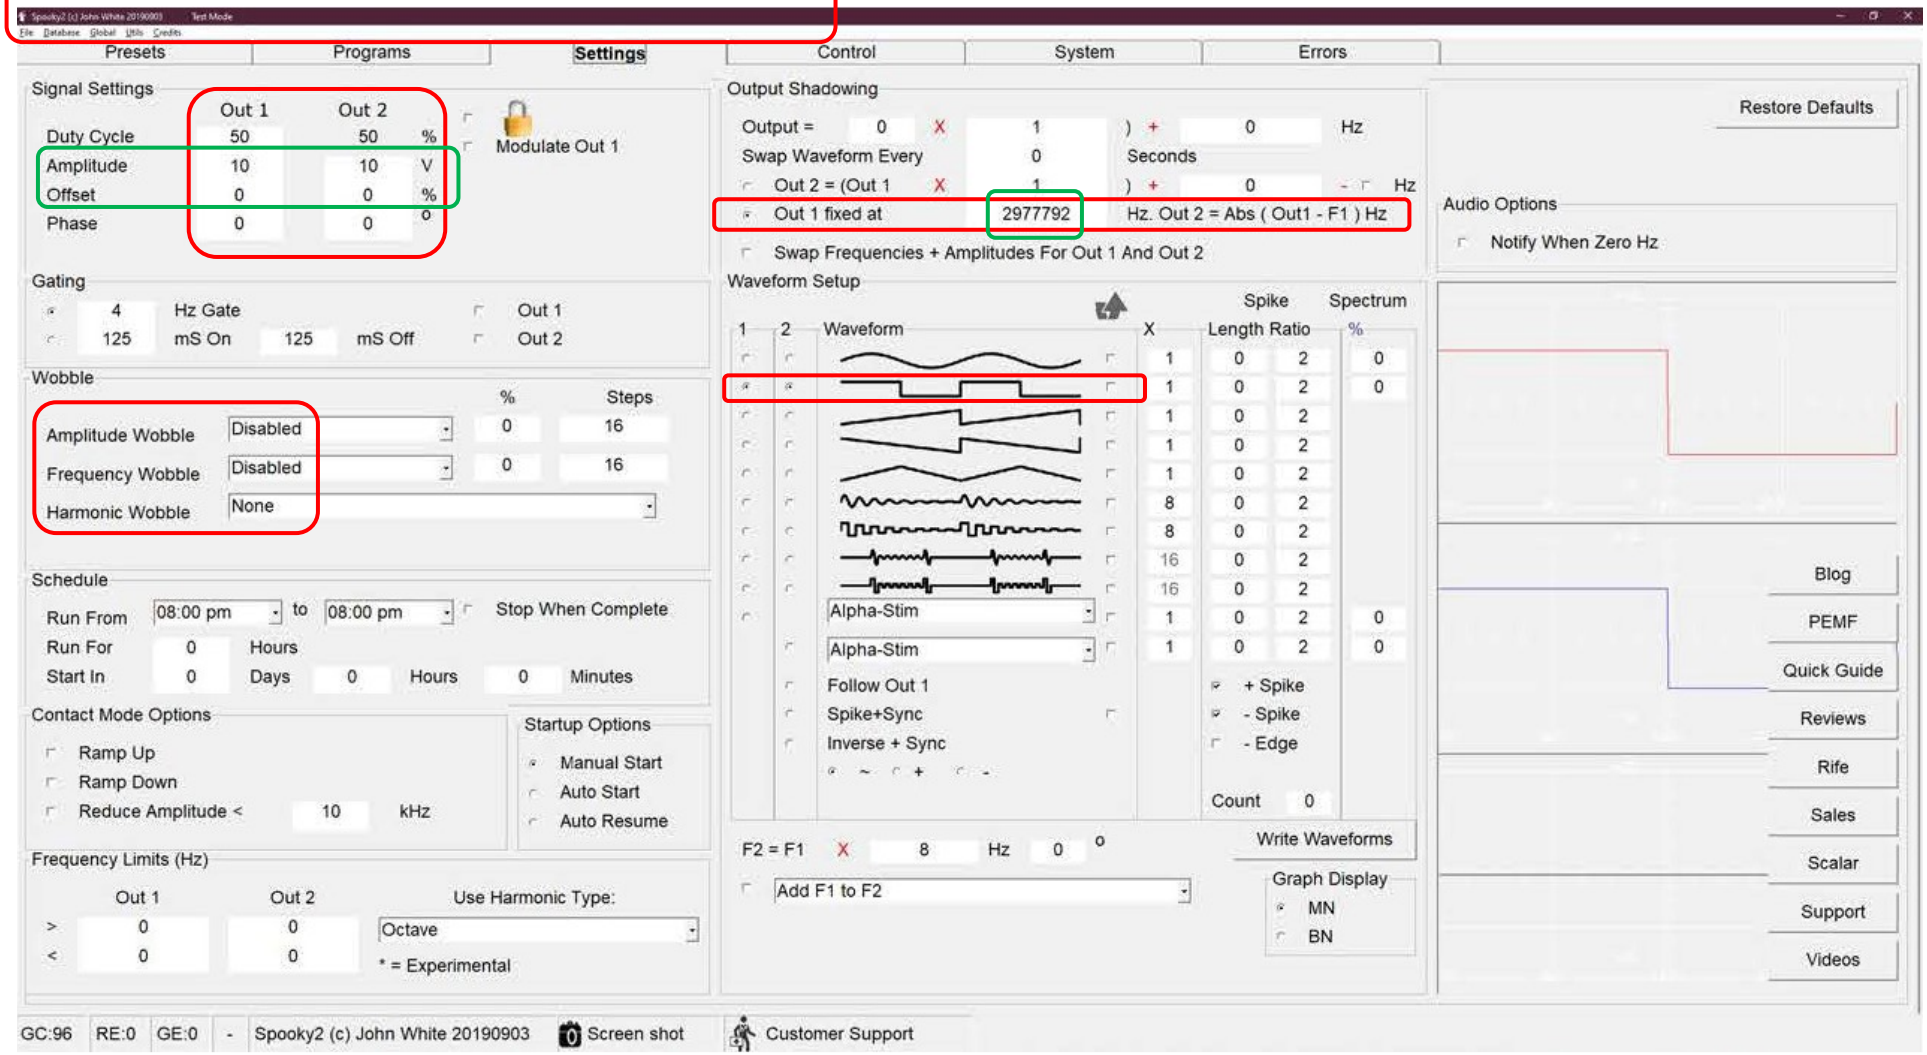

Published by AEHTE LLC https://viaDNAremote.com **Document Version: 210909**